


AIR FILTRATION
& AIR QUALITY

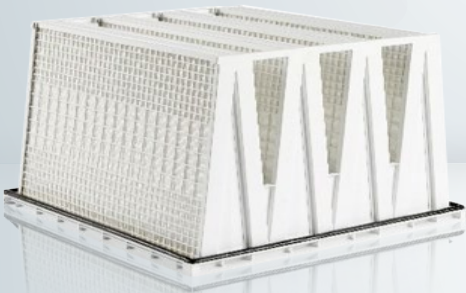

MULTITUR-HE 292

High Efficiency Rigid Pocket Filters

APPLICATIONS

- EPA-HEPA Filters absolute air filtration
- High efficiency air filtration
- Reduced dimensions and high flow filter units
- Especially for gas turbine and compressor
- Deep V type increased surface provides high flow rate
- Lower initial pressure drop compared to standard rigid pocket
- Air outlet direction wire and gasket

FILTER CODE STRUCTURE

Type	MT	MULTITUR-HE292
Class EN1822	13	H13
Frame	P	Plastic
Rigid Pocket Pieces	4	4 Rigid Pocket
Color	B	B: White S: Black
Flange Thickness	25	25: 25 mm - 20: 20 mm
Frame Mold Type	A	A: 25 mm Flange B: 20 mm Flange C: 25 mm & 20 mm Flange
Media	R	R: Micro Glass Fibre Y: High Heat Glass Fibre (120 °C)
Media Area	24	24m ²
Gasket Type	P	X: Without Gasket P: Polyurethane R: Rubber E: EPDM
Gasket Direction	C	X: No C: Air Outlet G: Air Inlet W: Both Side
Size		0592-0592-292

TECHNICAL SPECIFICATIONS

Class EN1822	E10	E11	E12	H13	H14
Av. Efficiency EN1822	≥85%	≥95%	≥99.5%	≥99.95%	≥99.995%
Max. Temperature	80°C (Optional 120°C)				
Relative Humidity	100 %				
Rec. Final Pres. Drop	600 Pa.				
Filter Stage	III - IV				

For more information please click here.